

Panel/

paneling and door application

DAYORIS has taken "doors flush with paneling" to a new level.

Our technicians have designed a door profile that enables a partner woodworker or millwork shop applying wall paneling to incorporate the same paneling finish to a DAYORIS Door while still maintaining a flush appearance with the adjoining wall. Doors can be delivered to the job-site prepared for contractors finishing, giving installers the opportunity to match these doors and hardware resulting in a consistent finish throughout the project.

Technical Specifications:

Solid Core Door Slab to be finished by Millworker

Thickness range - 1" to 1-3/4"


Finish - Primed

Hinges - CEAM Italia 3D adjustable

Frame - Aluminium

Handset - DAYORIS Italia

Mortise - Bonaiti Magnetic

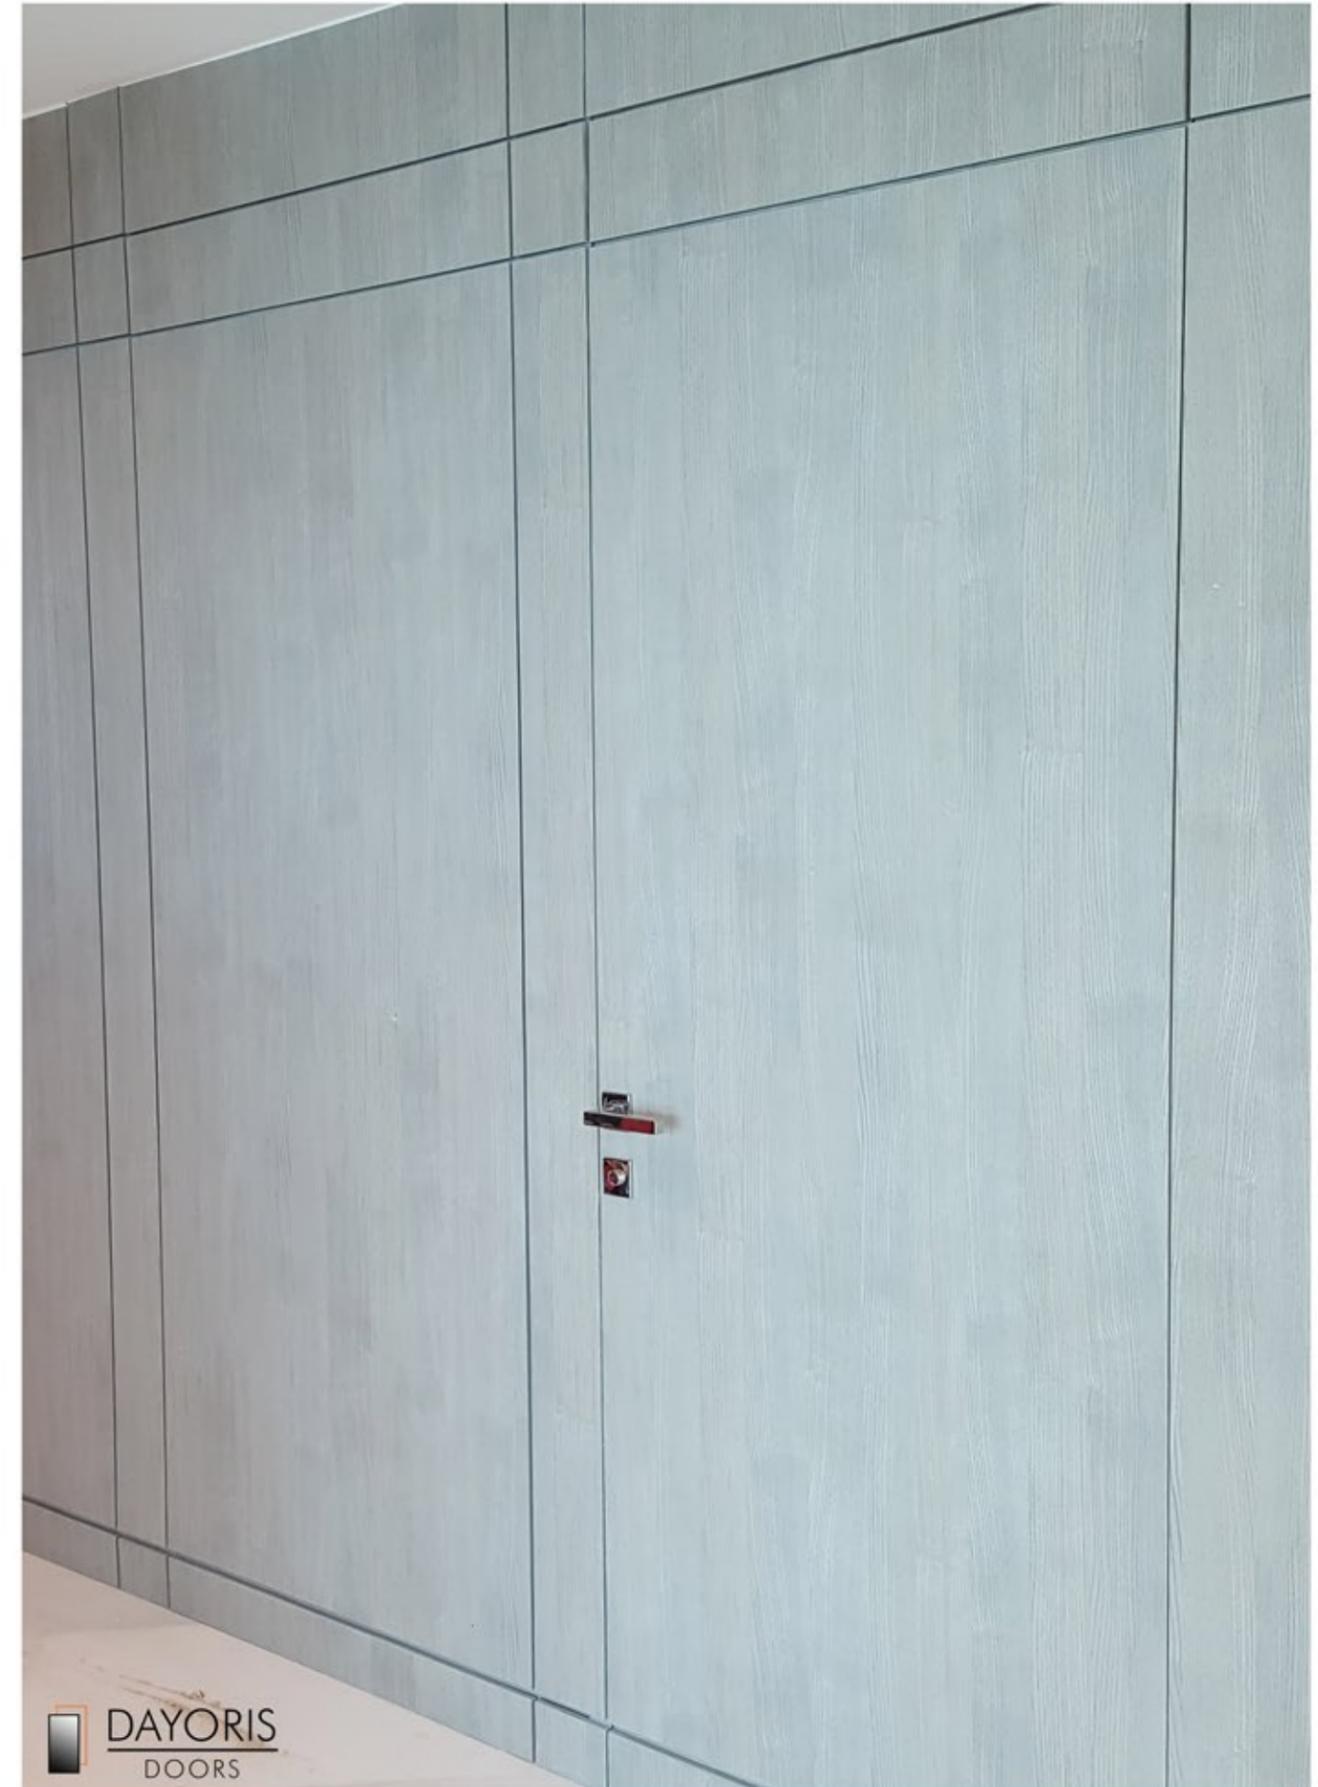




Panel/ Brown Orleans Oak with 1/8" reveals





Panels/ Wenge with 1/2" stainless steel reveals and invisible door application

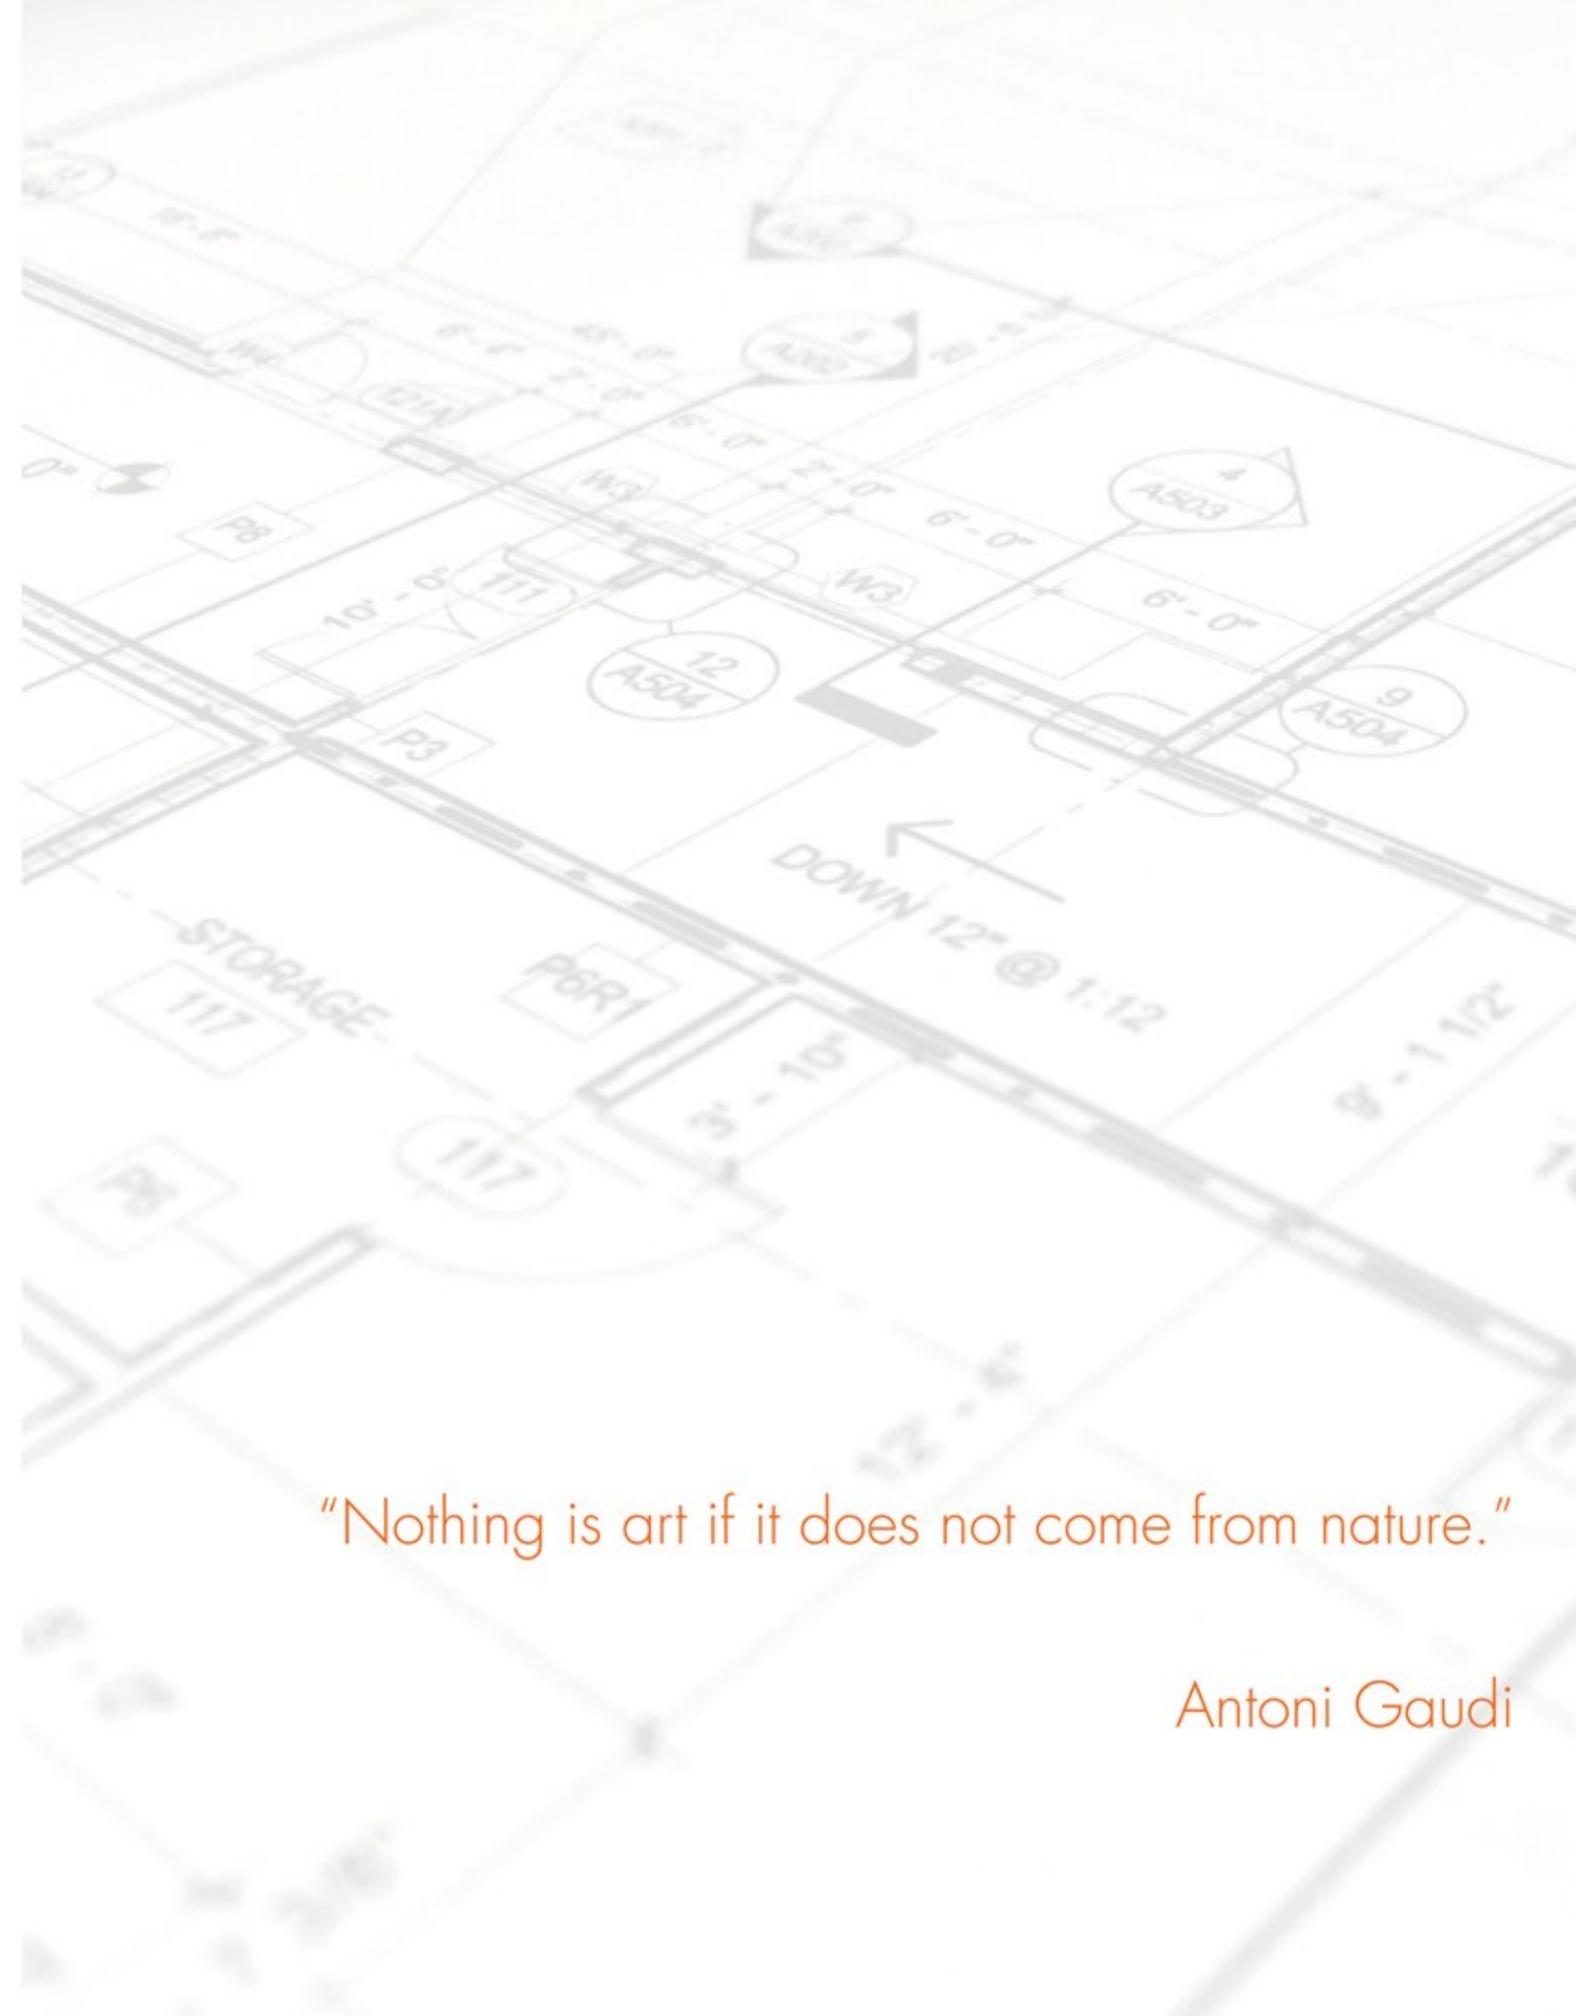

"Nothing is art if it does not come from nature."


Antoni Gaudi

Panel layout options


Reveal designs from 1/8" to 1/2" space

Finishes


Primed, Laminated, Lacquered, Veneered (custom finishes available)

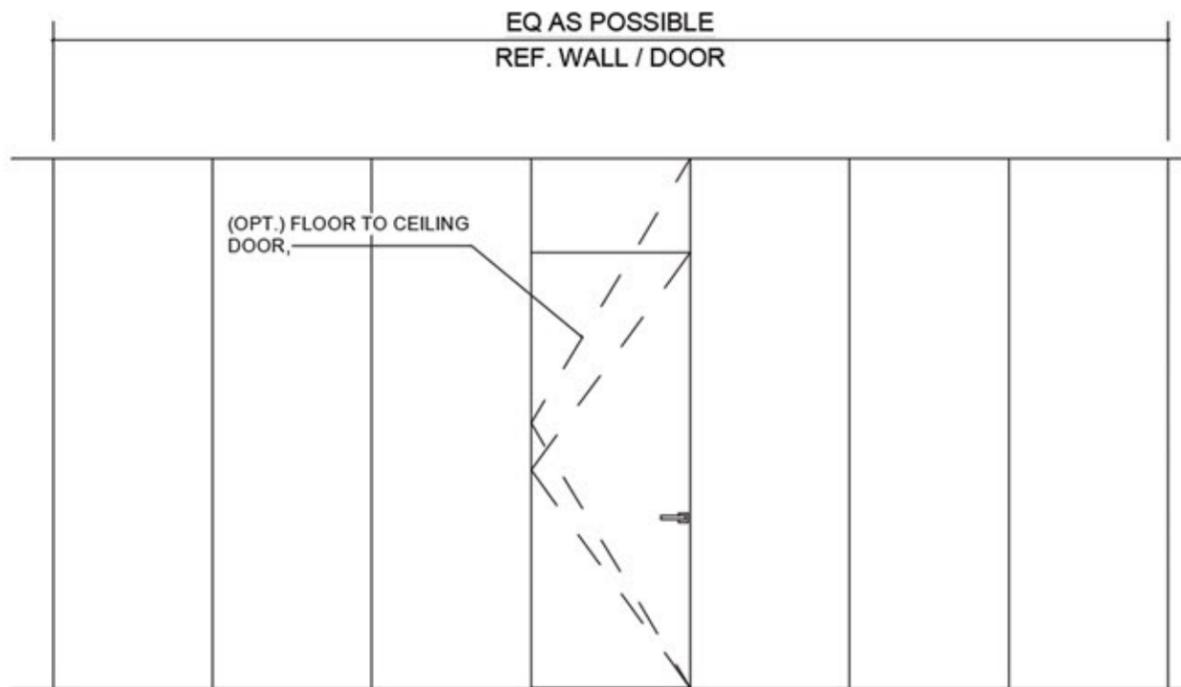


FULL HEIGHT

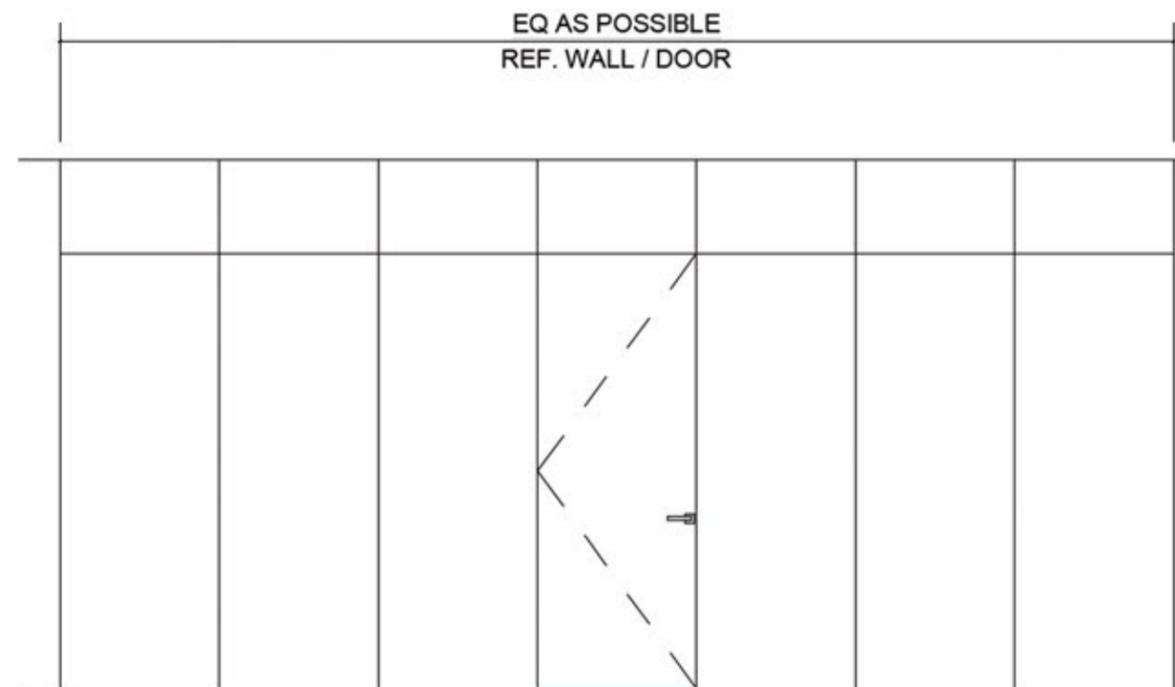

DOOR HEIGHT

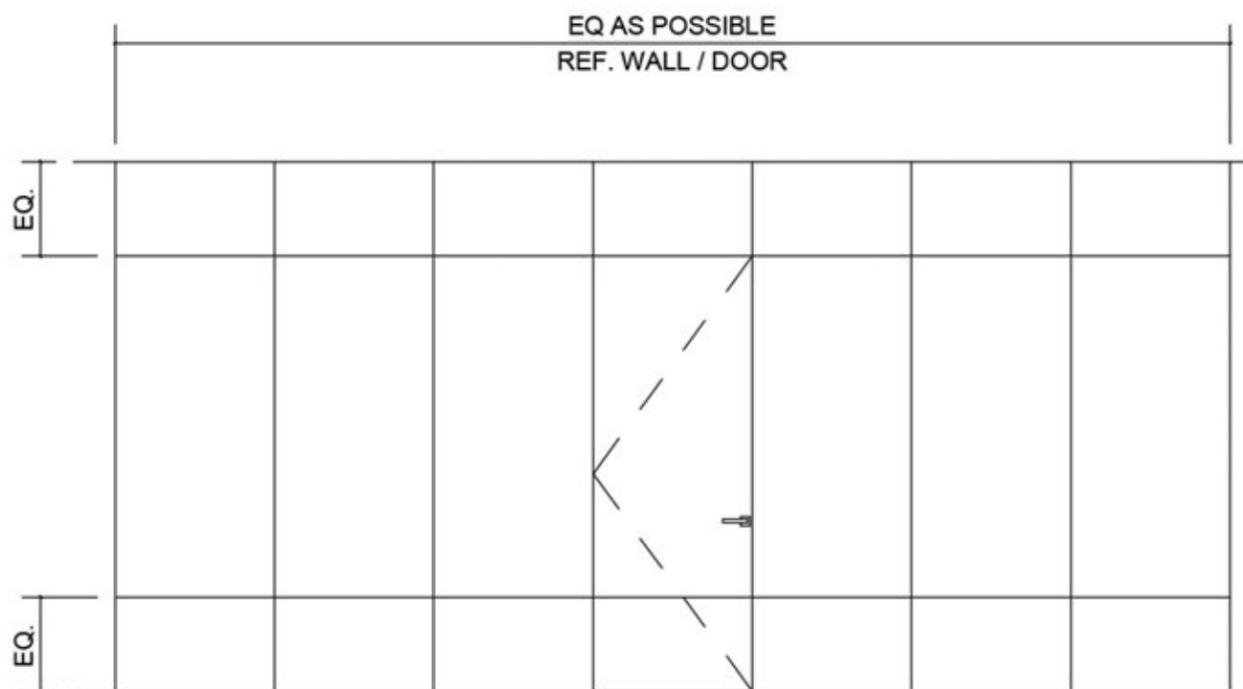

MIRRORED HEIGHT

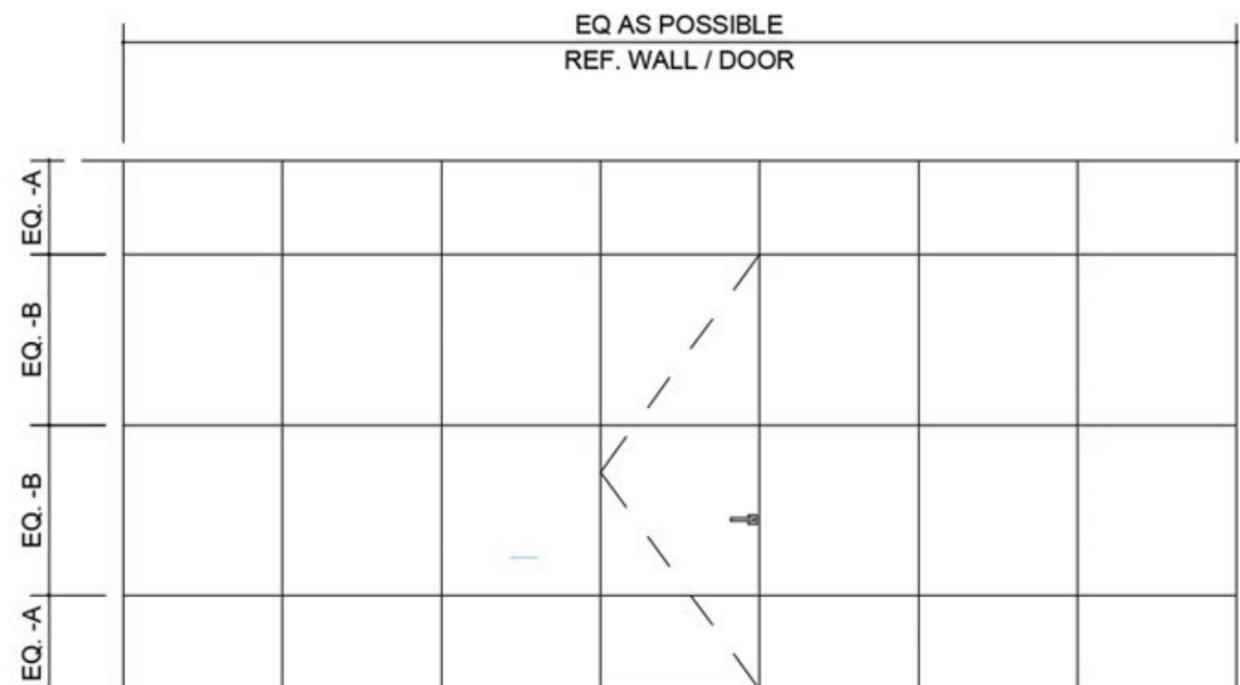


SPLIT HEIGHT

Panel layout options


Reveal designs from 1/8" to 1/2" space

Finishes


Primed, Laminated, Lacquered, Veneered (custom finishes available)

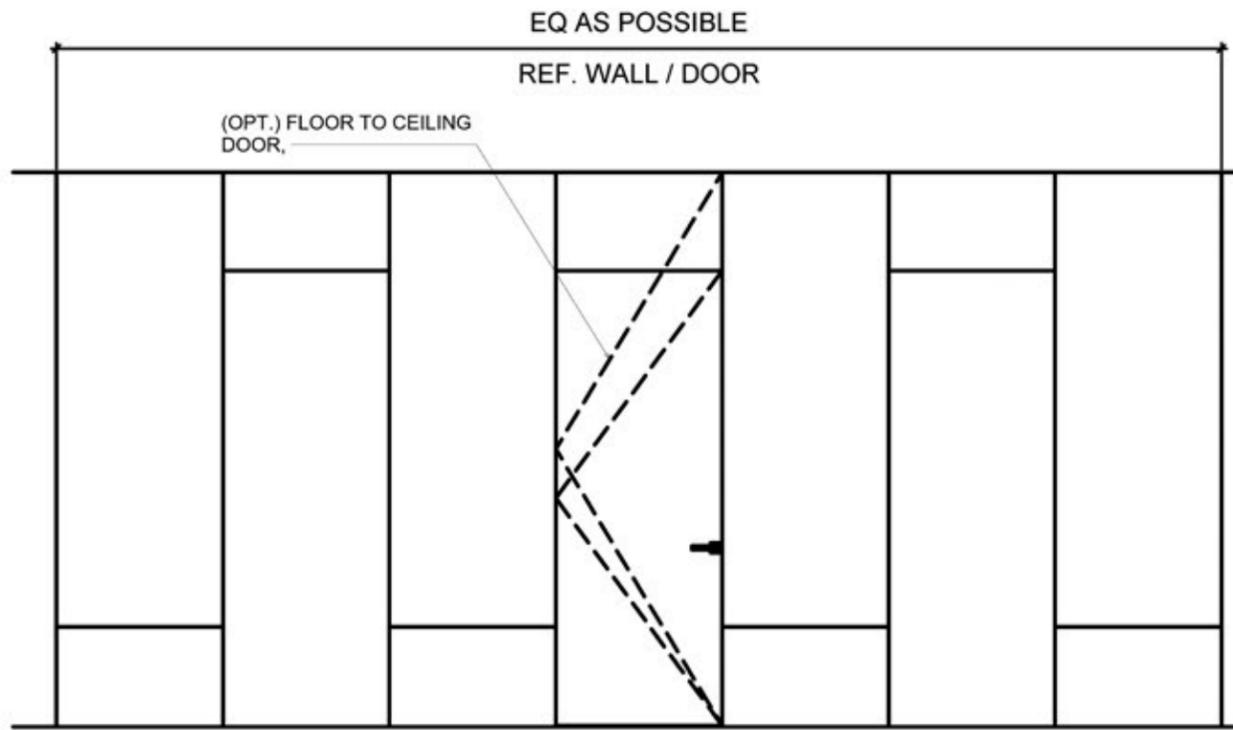


REVERSED HEIGHT

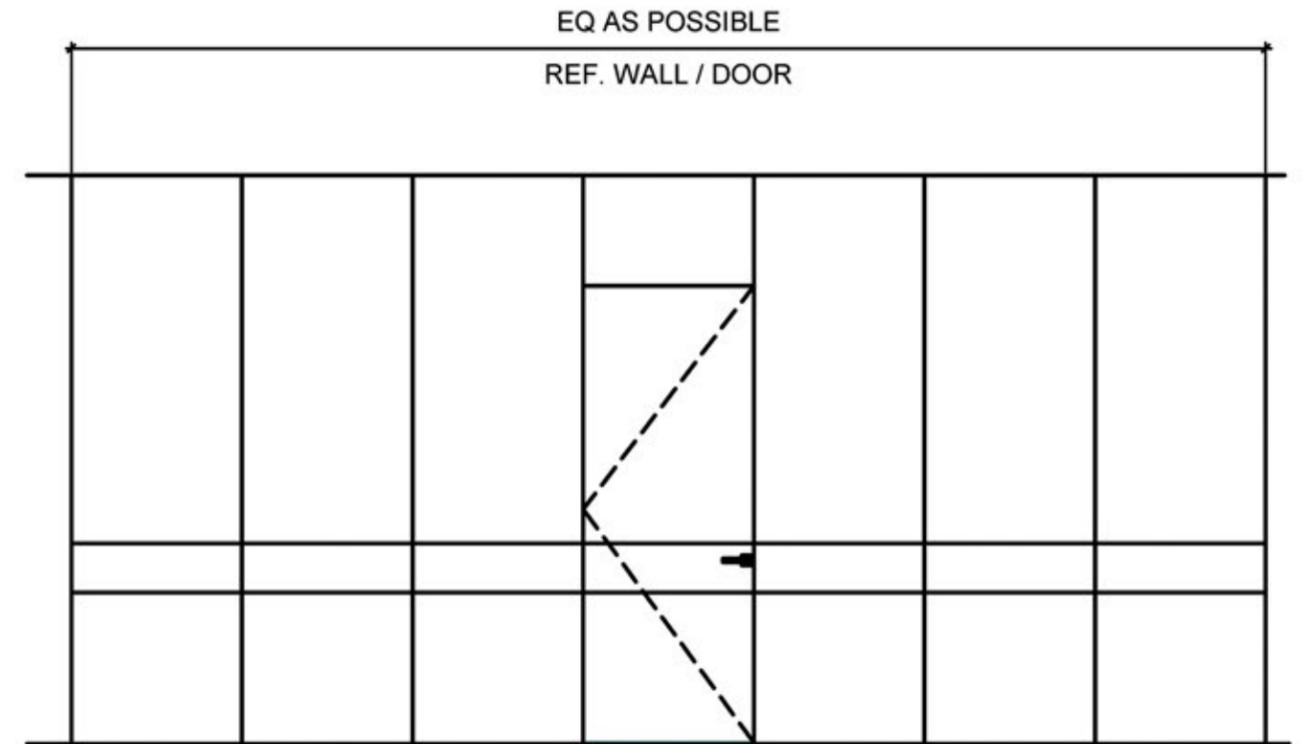

HARDWARE HIGHLIGHT

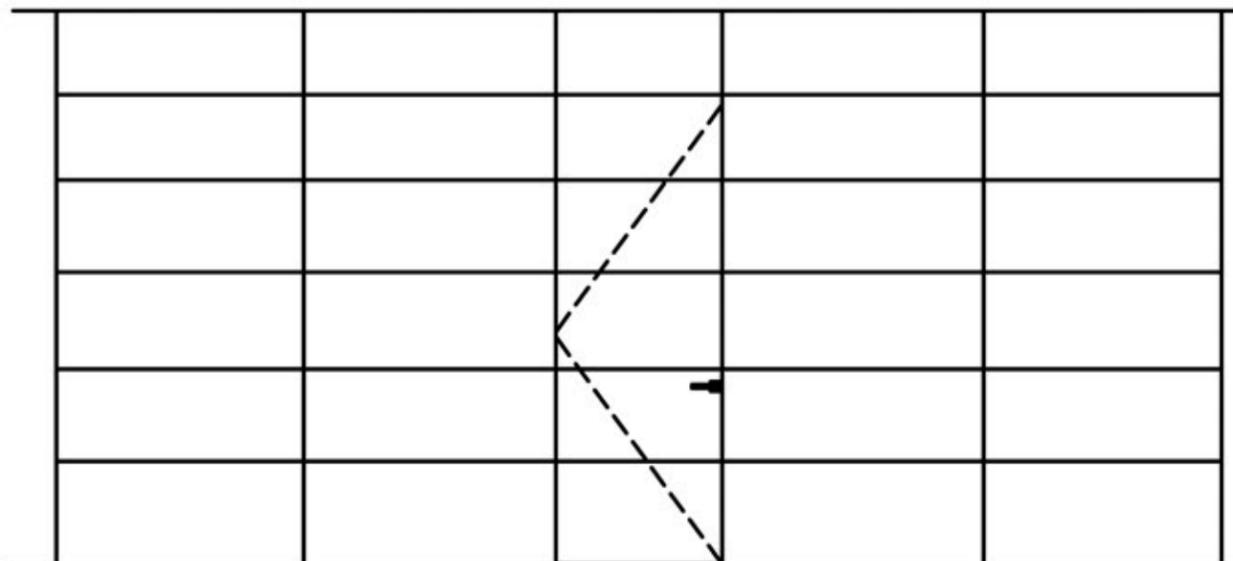

BLOCKS

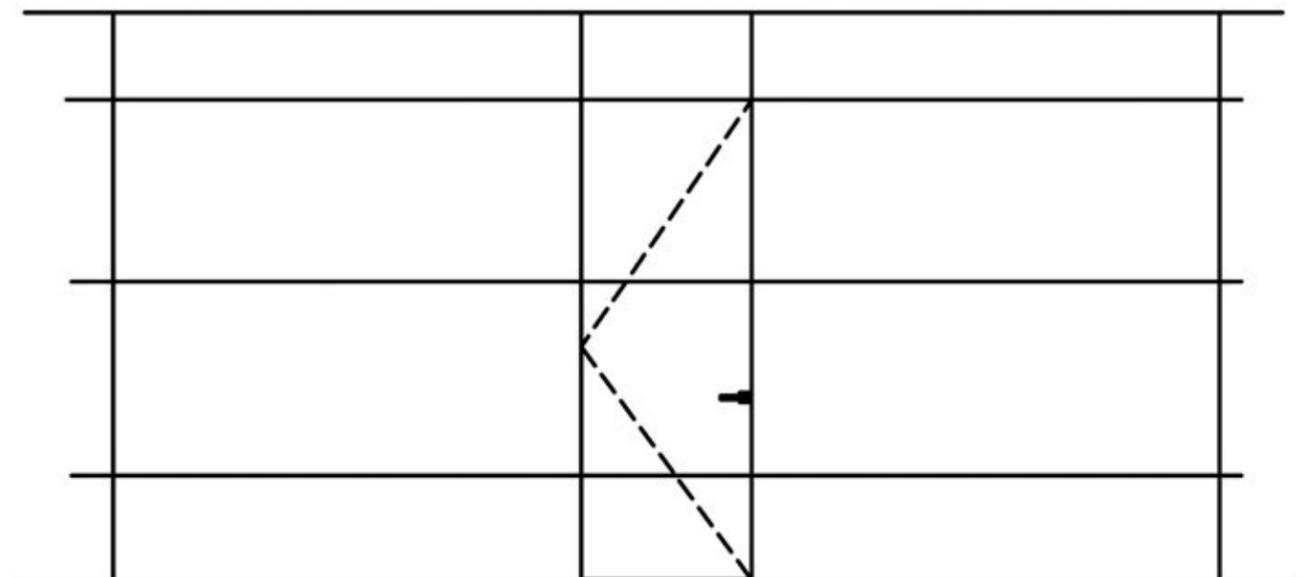

BLOCKS II