Ombra/ floating jamb with shadow reveal EURO BIFOLD DOOR







Types of Applications



Finishes

Primed / Laminated Import

Laminated Suncrest / Matte Lacquer

Wood veneer

What's included

Technical Specifications: 1" Solid Core MDF Door Finish – Designer's choice Frame – Concealed aluminum Design – Designers Choice



Frame Profile Finishes




Shadow reveal by others





Benefits of Ombra/ euro bifold door

Any Wall Thickness

Lighter Door and Space saver








A thinner, economical application for non walk-in closets

Single

Double

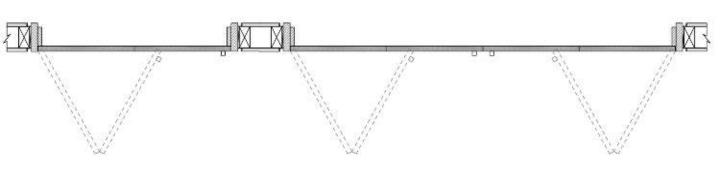

Works with ½" depth reglet (any height). Can be used with 5/8" drywall.






DEPTH	WIDTH	NON-VENTED
1/2"	1/8"	DRMZ-25-125
1/2"	1/4"	DRMZ-50-25
1/2"	3/8"	DRMZ-50-375
1/2"	1/2"	DRMZ-50-50
1/2"	5/8"	DRMZ-50-625
1/2"	3/4"	DRMZ-50-75
1/2"	1"	DRMZ-50-100
1/2"	1 1/2"	DRMZ-50-150
1/2"	2"	DRMZ-50-200


* Fry reglet for reference purposes only, not provided by Dayoris.



Framing Instructions Ombra/ euro bifold door

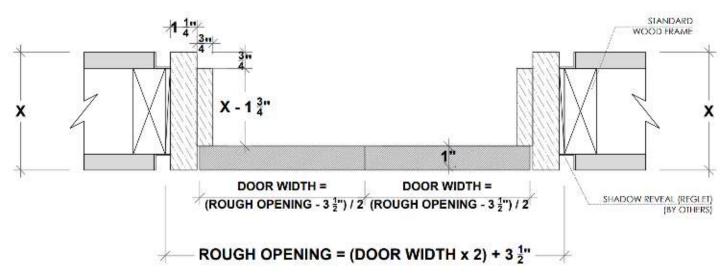


X = THE WALL CAN BE ANY THICKNESSALL OPENINGS MUST HAVE WOOD SUPPORT (2" x 4", 2" x 6", 2" x 8", ...)

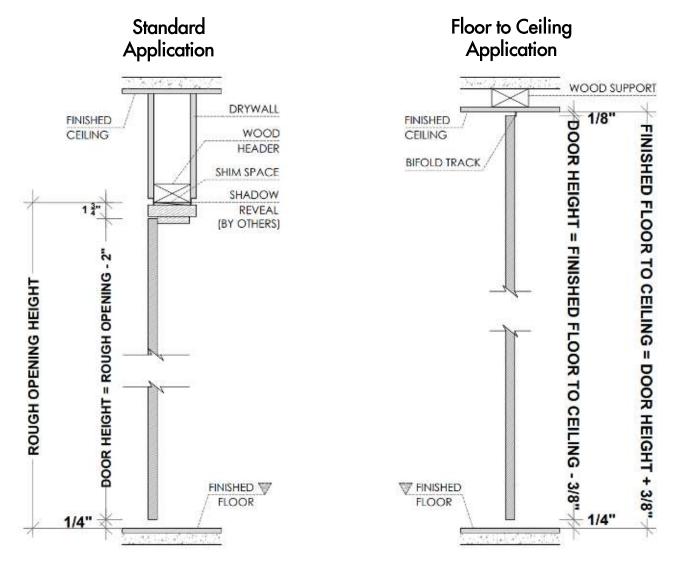


PLEASE ACCOUNT FOR FINISHED FLOOR FOR ALL MEASUREMENTS GIVEN TO DAYORIS.



Outswing Application (bifold door only available outswing)

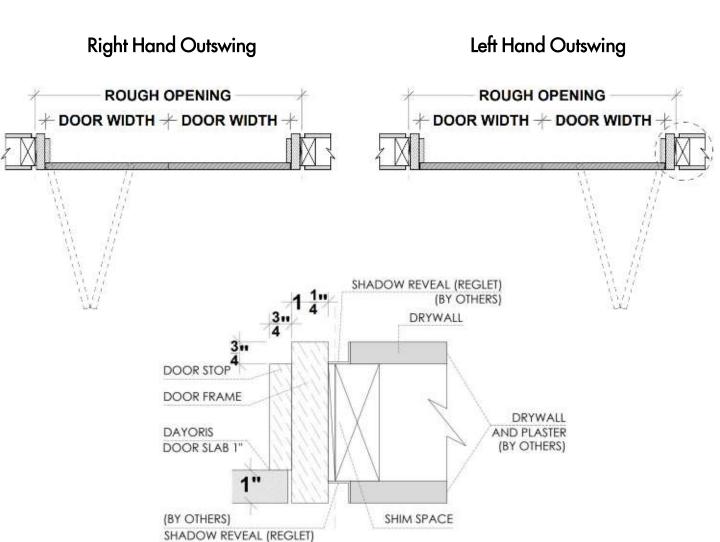

Double Door Applications

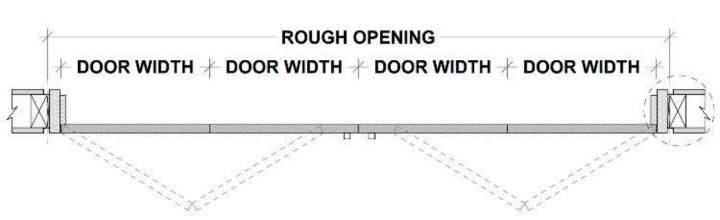

DOOR WIDTH = (ROUGH OPENING $-3 \frac{1}{2}$ ") /4 ROUGH OPENING = (DOOR WIDTH $\times 4$) $+3 \frac{1}{2}$ "