
Ombra/ floating jamb with shadow reveal POCKET DOOR







Types of Applications

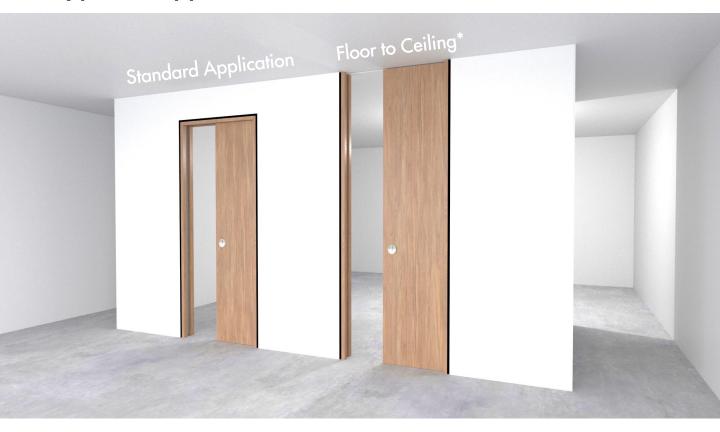

Finishes

Primed / Laminated Import

Laminated Suncrest / Matte Lacquer

Wood veneer

What's included

Technical Specifications: Solid Core Door Slab Finish – Designer's choice Handset – DAYORIS Italia Design – Designers Choice

Applications

Standard Application



Floor to Ceiling Application *




* Optional Upgrade



1. Builders grade Pocket Frame Kit

Limited to Door size up to 3' x 8'


Usually provided by others, available from Dayoris as an optional upgrade. (for optimal use, Dayoris recommend option 2, framing with 2x6).

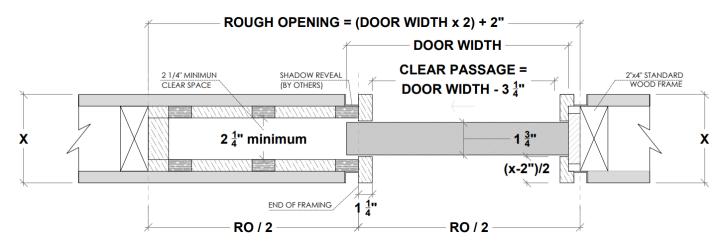

X = THE WALL CAN BE ANY THICKNESS ALL OPENINGS MUST HAVE WOOD SUPPORT (2×4 , 2×6 , 2×8 , ...)


1.a Standard Application with Builders Pocket Frame

HAFELE Track RO = DH (Door Height) + 2 $\frac{3}{4}$ " (from Finished Floor)

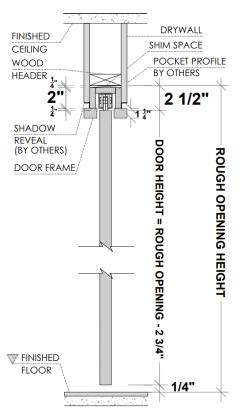




1.b Floor to Ceiling Application with Builders Pocket Frame Kit

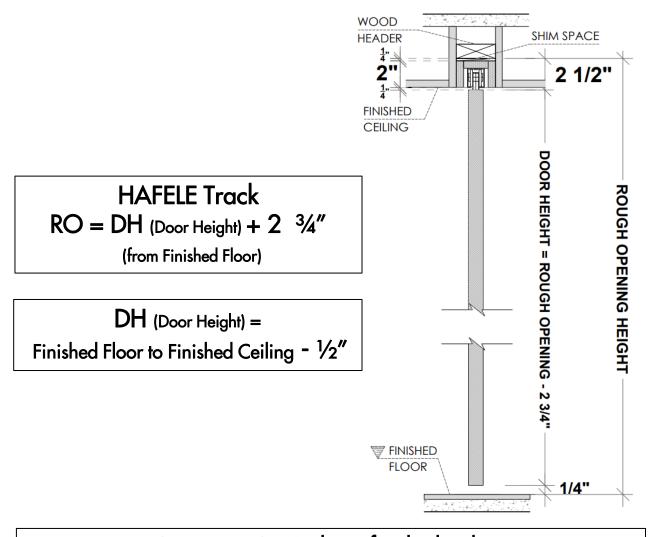


Support at 2 1/4" above finished ceiling

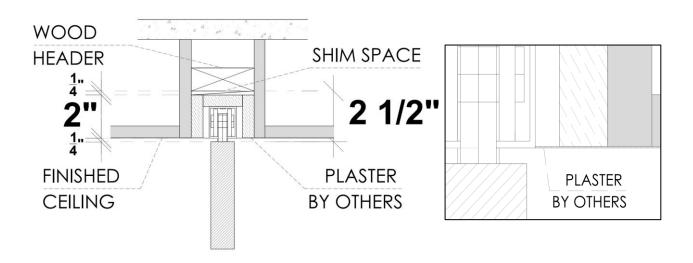




2. Pocket Frame with 2x6 and 1 5/8" Studs Structure (by others)

Recommended Application

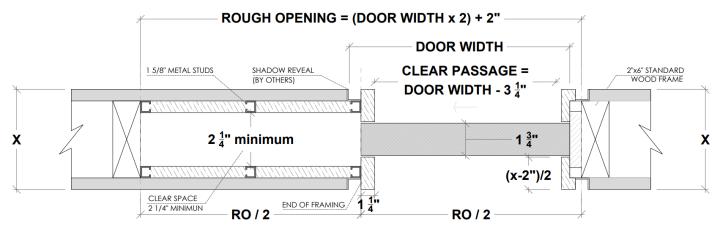

ALL OPENINGS MUST HAVE WOOD SUPPORT (2x6)

2.a Standard Application with 2x6 Frame and 1 5/8" Studs

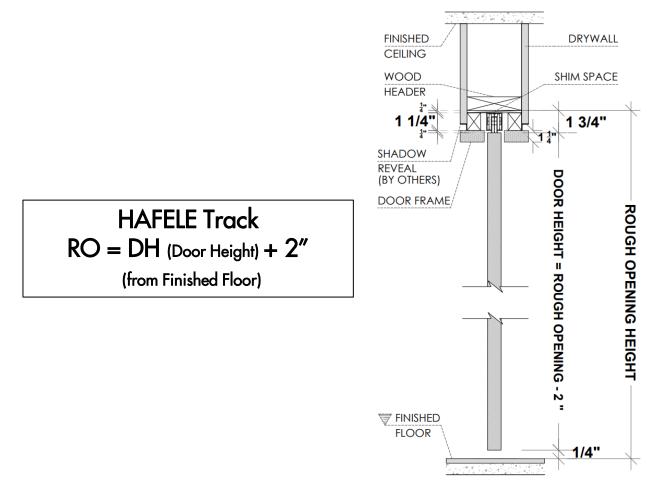


PLEASE ACCOUNT FOR FINISHED FLOOR FOR ALL MEASUREMENTS GIVEN TO DAYORIS




Ombra/ pocket door

1. Pocket Frame with 2x6 and 1 5/8" Studs Structure (by others)

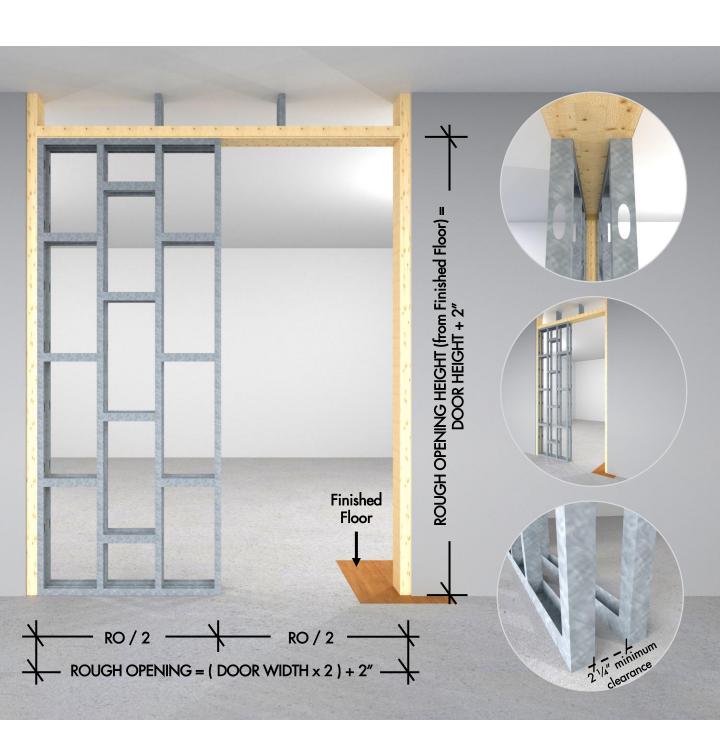




2.b Floor to Ceiling Application with 2x6 and 1 5/8" Studs

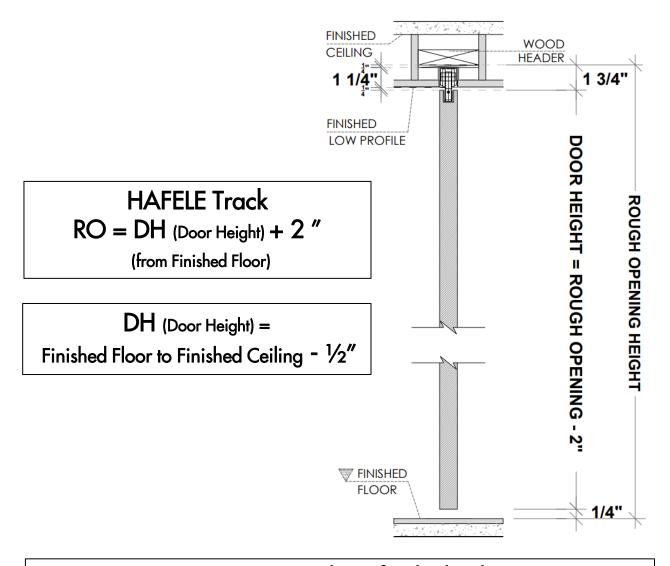

Support at 1 1/2" above finished ceiling

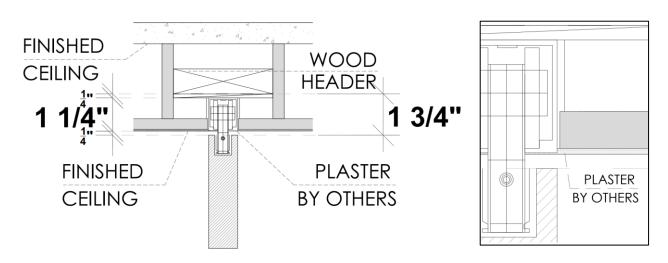



Hardware

Pocket and Sliding Door Hardware

